




HD 6/15 G Classic

Compact and mobile HD 6/15 G Classic cold water high-pressure cleaner with petrol engine and robust crankshaft pump. Ideally suited for municipalities, construction and handicraft.



1 Independence

- Allows independence of external power sources.
- Complies with the requirements of exhaust emissions standard EU STAGE V.

2 Outstanding mobility

- Large wheels with pneumatic tyres for uneven surfaces.
- For good mobility, easy transport and space-saving storage – fits in a standard car.

3 Durable and sturdy

- A robust tubular steel frame reliably protects the machine against damage.
- Thermostat valve to protect the pump from overheating in recirculation mode.

4 Storage for accessories

- Hose hook and accessory storage for simple storage and carrying.
- Ergonomic grip and hose storage.



HD 6/15 G Classic

- Independent high-pressure cleaning irrespective of external power sources
- Compact, light and extremely mobile

Technical data

Order no.	1.187-010.0	
EAN code	4054278731643	
Operating pressure	bar / MPa	150 / 15
Max. Pressure	bar / MPa	200 / 20
Flow Rate	l/h	600
Drive type	Petrol	
Motor type	G200FA	
Power Rating	kW / hp	4,1 / 5,5
number of simultaneous users	1	
Weight	kg	42,5
Dimensions (L × W × H)	mm	878 × 538 × 702

Equipment

Trigger gun	Standard	
High-pressure hose	m	10
Spray lance	mm	600
Cage frame	■	
Anti-twist system (AVS)	-	
Electric starter	-	
Crankshaft pump with ceramic pistons	■	
Servo Control	-	

■ Included in delivery.

HD 6/15 G CLASSIC

1.187-010.0

KÄRCHER



		Order no.	Flow Rate					Price	Description	
Trigger guns										
Standard trigger gun	1	9.751-139.0							High-pressure gun for machines of the HD Classic range. With adapter for high-pressure hoses M 22 x 1.5.	■
EASY!Force Advanced	2	4.118-005.0							Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.	□
Conversion kit 2 from device	3	4.111-051.0							Provides all the parts required to utilise our EASY!Force technology even on our non-Easy!Force machines. Including adaptors, lance, Easy!Force trigger gun and hose.	□
Quick connect										
Quick coupling	4	6.401-458.0							For quick change of different spray lances and accessories. Optimum adaption to Kärcher accessories, especially for connection between trigger gun and spray lance. With M22 x 1.5 female.	□
Plug nipple	5	6.401-459.0							Hardened stainless steel nipple for quick coupling 6.401-458. With M22 x 1.5 male.	□

■ Included in delivery. □ Available accessories.

HD 6/15 G CLASSIC

1.187-010.0

KÄRCHER



		Order no.	Max. working pressure	Length		Price	Description	
Spray lance								
Jet pipe for replacement 600mm	1	9.751-140.0						■
Lance 250 mm, non-rotatable	2	4.760-667.0		250 mm			250 mm stainless steel lance. With manual coupling. Non-rotatable.	□
Rotating spray lances								
Spray lance	3	4.760-664.0	300 bar	600 mm			600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
	4	4.760-663.0	300 bar	840 mm			850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
	5	4.760-660.0	300 bar	1050 mm			1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
	6	4.760-661.0	300 bar	1550 mm			1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
	7	4.760-662.0	300 bar	2050 mm			2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
Angular spray lance								
WC and gutter lance	8	4.760-073.0					Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	□
Flexible spray lance								
Flexible lance	9	6.394-654.0	210 bar	1050 mm			1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	□
High pressure articulated joint	10	4.481-039.0	300 bar				High-pressure articulated joint: Thanks to infinite angle adjustment up to 120°, this tool is ideal to effortlessly clean hard-to-reach areas. Simply attach to the spray lance of the pressure washer.	□
Inaktiv								
Restraint belt for telescopic jet pipe	11	6.373-987.0					Convenient strap for relief when working with the telescopic spray lance (6.394-690). The burden is optimally distributed on the body and longer periods of use are possible.	□
Undercarriage spray lance								
Underbody lance	12	4.760-245.0		700 mm			Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	□

■ Included in delivery. □ Available accessories.

HD 6/15 G CLASSIC
1.187-010.0



		Order no.	Nozzle size				Price	Description	
Power nozzle spray angle 25°									
Power Nozzle	1	2.885-255.0	35						■

■ Included in delivery. □ Available accessories.

HD 6/15 G CLASSIC
1.187-010.0



		Order no.	Max. working pressure	Nozzle size			Price	Description	
Dirt blaster, large									
Dirt Blaster Nozzle	1	4.763-252.0	300 bar	40				The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	<input type="checkbox"/>

■ Included in delivery. ☐ Available accessories.

HD 6/15 G CLASSIC

1.187-010.0

KÄRCHER


		Order no.	ID	Max. working pressure	Length	Price	Description	
Standard with unions on both sides								
High-pressure hose	1	6.391-342.0	DN 8	315 bar	10 m		To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 x 1.5.	<input type="checkbox"/>
	2	6.390-010.0	DN 8	315 bar	15 m		With rotary coupling, 2 x M 22 x 1.5	<input type="checkbox"/>
	3	6.390-031.0	DN 8	315 bar	20 m		With M 22x1.5 union at both ends and anti-kink protection ID 8/155°C/315 bar	<input type="checkbox"/>
	4	6.390-293.0	DN 8	315 bar	30 m		With rotary coupling, 2 x M 22 x 1.5	<input type="checkbox"/>
Longlife 400 with unions on both sides								
High-pressure hose Longlife	5	6.390-178.0	DN 8	400 bar	1,5 m		1.5 m high-pressure hose (DN 8, M 22 x 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 x 1.5).	<input type="checkbox"/>
	6	6.388-083.0	DN 8	400 bar	10 m		10 m high-pressure hose Longlife 400 (DN 8) with rotary coupling, two layer high-strength steel wire reinforced. Connectors at both ends. M 22 x 1.5, with kink protection.	<input type="checkbox"/>
	7	6.391-354.0	DN 8	400 bar	10 m		To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 x 1.5.	<input type="checkbox"/>
	8	6.389-709.0	DN 8	400 bar	15 m		With rotary coupling, 2 x M 22 x 1.5	<input type="checkbox"/>
	9	6.390-027.0	DN 8	400 bar	20 m		with rotary coupling, 2 x M 22 x 1.5	<input type="checkbox"/>
	10	6.390-294.0	DN 8	400 bar	30 m		With rotary coupling, 2 x M 22 x 1.5	<input type="checkbox"/>
Longlife food industry version with unions on both sides								
High-pressure hose food grade	11	6.391-864.0	DN 8	400 bar	10 m		Longlife HP hose for use in the food industry. Außendecke## animal-grease-resistant, non-colour-bleeding material. With rotary coupling, 2 x M 22 x 1,5	<input type="checkbox"/>
	12	6.391-887.0	DN 8	400 bar	20 m			<input type="checkbox"/>

■ Included in delivery. □ Available accessories.

HD 6/15 G CLASSIC

1.187-010.0

KÄRCHER



		Order no.	Max. working pressure	Nozzle size	Diameter	Price	Description	
Pipe cleaning hose, ID 6								
Hose assembly TR pipe cleaning DN6 max.2	1	6.110-046.0	250 bar				The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	<input type="checkbox"/>
Pipe cleaning hose	2	6.390-028.0	120 bar				20 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	<input type="checkbox"/>
Pipe cleaning hose, DN 6, 20 m, 220 bar	3	6.110-008.0	250 bar				20 m flexible high-pressure hose (DN 6) for cleaning pipes up to 220 bar (threaded connection for R 1/8 nozzle).	<input type="checkbox"/>
Pipe cleaning hose, DN 6, 30 m	4	6.390-029.0	120 bar				30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	<input type="checkbox"/>
Hose assembly TR pipe cleaning DN6 max.2	5	6.110-047.0	250 bar				The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	<input type="checkbox"/>
Pipe cleaning hose, DN 6, 20 m, 220 bar	6	6.390-030.0	250 bar				20 m flexible high-pressure hose (DN 6) for cleaning pipes up to 220 bar (threaded connection for R 1/8 nozzle).	<input type="checkbox"/>
Pipe cleaning nozzle								
Dirt blaster pipe cleaning D21/040	7	4.765-001.0		40	21 mm		The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling.	<input type="checkbox"/>
Dirt blaster pipe cleaning D30/040	8	4.765-004.0		40	30 mm			<input type="checkbox"/>
Drum and tank cleaning								
Add-on kit mud sucker	9	2.641-798.0						<input type="checkbox"/>

■ Included in delivery. □ Available accessories.

HD 6/15 G CLASSIC

1.187-010.0

KÄRCHER


		Order no.	Flow Rate	Nozzle size	Diameter	Price	Description	
Hard Surface Cleaner FRV 30								
FRV 30	1	2.642-999.0					With the integrated and automatic suction of the dirty water, the FRV 30 makes surface cleaning even more efficient. Machine specific nozzle kit must be ordered separately.	<input type="checkbox"/>
Add-on kit rubber lip	2	2.642-910.0					For smooth floors indoors. The squeegee increases the suction performance of the FRV 30 and minimises the amount of water remaining. This means the floor is dry in just a few minutes.	<input type="checkbox"/>
Extension hose 5 m	3	4.440-939.0					5m extension hose for FRV 30. Connection sleeve included.	<input type="checkbox"/>
Add-on kit hose attachment	4	2.642-528.0					Suction cup for fixing the suction hose to smooth surfaces.	<input type="checkbox"/>
Add-on kit dirt trap	5	2.642-532.0					Galvanised steel bucket for collecting coarse dirt and for fixing the suction hose in outside areas.	<input type="checkbox"/>
Hard surface cleaner FR 30								
Surface Cleaner FR 30	6	2.642-997.0			300 mm		Up to 10 times greater area coverage compared with the conventional high pressure jet.	<input type="checkbox"/>
Hard surface cleaner FR 30 ME								
FR 30 ME surface cleaner	7	2.640-355.0			300 mm		Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	<input type="checkbox"/>
Hard Surface Cleaner FR 50								
FR 50 surface cleaner	8	2.640-679.0			500 mm		Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas. With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system.	<input type="checkbox"/>
Machine-specific nozzle kit for FR								
Nozzle kit for FR	9	2.640-401.0	500 - 650 l/h				Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (500 to 650 l/h).	<input type="checkbox"/>
Machine-specific nozzle kits for FRV								
Nozzle kit for FRV	10	2.642-431.0		40			Machine-specific nozzle kit Kärcher power nozzles and jet nozzle for FRV 30.	<input type="checkbox"/>
Hard surface cleaner FRV 30 Me								
FRV 30 ME	11	2.642-911.0					Surface cleaner with integrated waste water pick-up	<input type="checkbox"/>
Extension hose FRV 30 Me and FRV 50 Me	12	4.441-040.0					5 m extension hose for FRV 30 Me. Includes connecting adapter.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories.

HD 6/15 G CLASSIC

1.187-010.0

KÄRCHER



		Order no.	Flow Rate				Price	Description	
Cup foam lance									
Cup foam lance Advanced	1	6.394-969.0							<input type="checkbox"/>
Inno Foam Set									
Inno foam kit with detergent injector	2	2.640-151.0						High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	<input type="checkbox"/>
Easy Foam Set									
Easy Foam Set with RM injector	3	2.640-691.0						HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	<input type="checkbox"/>
Nozzle kits for Inno/Easy Foam Set									
Nozzle kit 055 z. Inno/Easy Set 500 - 600 l/h	4	2.640-870.0	500 - 600 l/h					Optimal adaptation to different machine outputs for economic use.	<input type="checkbox"/>
Foam nozzle mounting kit									
Foam nozzle kit	5	2.637-926.0						Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories.

HD 6/15 G CLASSIC

1.187-010.0


KÄRCHER


		Order no.						Price	Description	
Rotary coupling										
Rotary coupling	1	4.401-091.0							Kärcher rotary coupling prevents twisting and kinking of high-pressure hoses for ease of use. Connector M 22 x 1.5 m. With grip protection.	<input type="checkbox"/>
HP detergent injector										
Detergent injector for high pressure	2	3.637-170.0							Cleaning agent dosage at high pressure 3 - 5 %	<input type="checkbox"/>
Detergent injector for high and low pressure (without nozzles)	3	3.637-001.0							Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.	<input type="checkbox"/>
Machine-specific nozzle kit with order no. 3.637-170										
Nozzle insert trapezoidal thread HD-GER.	4	4.769-005.0							For HD 500 - 700 l/h. Consists of nozzle insert + HP power nozzle + union	<input type="checkbox"/>
Machine-specific nozzle kit with order no. 3.637-170.0 HD 500-700 l/h	5	4.769-045.0								<input type="checkbox"/>
Nozzle insert with order no. 3.637-001										
Nozzle insert for Order No. 3.637-001, high-pressure for machines up to 1100 l/h.	6	4.769-003.0							Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h.	<input type="checkbox"/>
Low pressure for units rated up to 1100 l/h	7	4.769-001.0							For low pressure with machines up to 1.100 l/h	<input type="checkbox"/>
Coupling										
Coupler -2xM22x1,5	8	4.403-002.0							Brass double connector for connecting and extending high-pressure hoses. With rubber protection. Connector: 2x M 22 x 1.5 m.	<input type="checkbox"/>
Connector										
Nozzle connector/screw connector	9	4.402-022.0							Nozzle connector/screw connector for connecting high-pressure nozzles and accessories to the high-pressure trigger gun (with nozzle connector). Connectors: 1x M 22 x 1.5 and 1x M 18 x 1.5.	<input type="checkbox"/>
Adapter										
Adapter M22 - Swivel	10	4.424-004.0							M22 x 1,5female and swivel connection. For extension of high-pressure hoses with AVS connection or for usage of the telescopic lance with a high-pressure hose with AVS connection.	<input type="checkbox"/>
Adapter EASY!Lock										
Adapter 1 M22AG-TR22AG	11	4.111-029.0							Adapter 1 to connect the old hose with the new hose	<input type="checkbox"/>
Adapter 2 M22IG-TR22AG	12	4.111-030.0							Adapter 2 to connect the old device with the new hose and the old gun with the new hose	<input type="checkbox"/>
Adapter 3 M22IG-TR22AG	13	4.111-031.0							Adapter 3 to connect the old gun with the new spray lance and new servo regulator	<input type="checkbox"/>
Adapter 5 TR22IG-M22AG	14	4.111-033.0							Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance	<input type="checkbox"/>
Adapter 6 TR22IG-M22AG	15	4.111-034.0							Adapter 6 to connect the new device with the old hose and the old hose with the new gun	<input type="checkbox"/>
Adapter 7 M18IG-TR20AG	16	4.111-035.0							Adapter 7 to connect the old spray lance with the new nozzle	<input type="checkbox"/>
Adapter 8 TR20IG-M18AG	17	4.111-036.0							Adapter 8 to connect the new spray lance with the old nozzle	<input type="checkbox"/>

■ Included in delivery. □ Available accessories.

HD 6/15 G CLASSIC

1.187-010.0

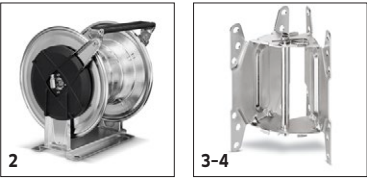

		Order no.	Length				Price	Description	
Automatic, self-winding hose reels									
Automatic stainless steel hose reel	1	6.391-520.0	20 m					Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit).	<input type="checkbox"/>
	2	6.392-442.0	40 m						<input type="checkbox"/>
Powder-coated swivel holder	3	2.639-931.0						Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.	<input type="checkbox"/>
Stainless steel swivel holder	4	2.641-867.0						Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.	<input type="checkbox"/>

■ Included in delivery.
 ☐ Available accessories.

HD 6/15 G CLASSIC

1.187-010.0

KÄRCHER



		Order no.	Nozzle size					Price	Description	
Wet blasting attachment (without nozzle)										
Wet blasting attachment with flow control (without nozzles)	1	4.762-010.0							Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.	<input type="checkbox"/>
Wet blasting attachment without flow control (nozzles not included)	2	4.762-022.0							Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control.	<input type="checkbox"/>
Nozzle pack for wet blasting attachment										
Nozzle pack TR wet jet set 0040	3	2.112-019.0	40						Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment 4.115-000.0 4.115-006.0.	<input type="checkbox"/>
Nozzle kit for wet blasting attachment 040	4	2.637-900.0	40						Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment 4.762-010/-022.	<input type="checkbox"/>
Boron carbide nozzle										
Boron carbide nozzle, for machines as of 1000 l/h	5	6.415-084.0	6 mm						In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories.

HD 6/15 G CLASSIC

1.187-010.0

KÄRCHER



		Order no.					Price	Description	
Geka coupling									
With hose nozzle, R 3/4"	1	6.388-455.0						with hose liner	<input type="checkbox"/>
Suction filter									
Water filter	2	6.414-956.0						Suitable for ponds, storage tanks or similar, polyamide filter casing, stainless steel strainer, 800 µm mesh, R 3/4" and R 1" connection, without non-return valve	<input type="checkbox"/>
Suction filter with check valve	3	4.730-012.0						Brass suction filter suitable for ponds, storage tanks, etc. With check valve.	<input type="checkbox"/>
Fine-mesh water filter									
Add-on kit water filter universal	4	2.637-020.0							<input type="checkbox"/>
Fine-mesh water filter with adapter	5	4.730-102.0						Fine-mesh water filter, 125 µm, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connection 3/4", with adapter, 1".	<input type="checkbox"/>
Water supply hose									
Water supply hose	6	4.440-038.0						NW 13 R1" / R 3/4", up to 30 °C	<input type="checkbox"/>
	7	4.440-207.0						NW 19 R1" / R 3/4", up to 85 °C, for pick-up	<input type="checkbox"/>
Backflow check valve									
Backflow preventer	8	2.641-374.0						To prevent detergent getting into the drinking water cycle in case of inlet at low-pressure. - hot water resistant up to 80 °C - tested according to IEC 60335-2-79 - integrated leakage protection	<input type="checkbox"/>

■ Included in delivery. □ Available accessories.

HD 6/15 G CLASSIC

1.187-010.0



		Order no.	Flow Rate				Price	Description	
Push-on washing brush									
Push-on wash brush, M 18 x 1.5	1	4.762-016.0						Push-on wash brush for universal use. Simply push on to lance. Connector: M 18 x 1.6.	<input type="checkbox"/>
	2	4.113-001.0							<input type="checkbox"/>
Rotating washing brush									
Rotating wash brush for < 800 l/h machines, nylon bristles	3	4.762-561.0	500 - 800 l/h					The rotating wash brush gently removes fine dust and traffic film from all surfaces. Temperature resistant up to 60°C. (M 18 x 1.5, replaceable brush insert).	<input type="checkbox"/>
Rotating wash brush for < 800 l/h machines, natural bristles	4	4.762-560.0	500 - 800 l/h					Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60°C, M 18 x 1.5 (replaceable brush insert).	<input type="checkbox"/>

■ Included in delivery. □ Available accessories.